

# 2MP ColourHunter HD Fixed Mini Bullet Analog Camera

UAC-B112-F28(40)-W



## Overview

UAC-B112-F28(40)-W is a 2MP ColourHunter HD Fixed Mini Bullet Analog Camera with a high-performance 1/3-inch CMOS sensor. It supports TVI/AHD/CVI/CVBS, which effectively enhances product adaptability and diversity of networking solutions. With SYV-75-3 or other coaxial cable types the camera can achieve low-cost, long-distance, anti-interference, and low delay mega-pixel HD video transmission. The camera provides 24/7 color images.

## Features

- 2MP high quality image
- TVI/AHD/CVI/CVBS
- Supports white light illumination, 24/7 color images
- Supports 180° horizontal flip, 180° vertical flip
- OSD configuration menu, easy to operate
- IP67 waterproof and dustproof design, high reliability
- OSD configuration menu in 11 languages


## Specifications

Sensor	Description
Pixel	2MP

Sensor Size	1/3.0"
Minimum Illumination	0.01 lux (F1.6, AGC ON) 0 lux (white light on)
<b>Lens</b>	<b>Description</b>
Focus	UAC-B112-F28-W:2.8mm UAC-B112-F40-W:4.0mm
Lens Mount	M12
Angle of View (H)	UAC-B112-F28-W:100.9° UAC-B112-F40-W:82.5°
Angle of View (V)	UAC-B112-F28-W:56.5° UAC-B112-F40-W:42.1°
Angle of View (D)	UAC-B112-F28-W:121.8° UAC-B112-F40-W:98.6°
<b>Illuminator</b>	<b>Description</b>
Illuminator Number	One white-light illuminator
Illumination Distance	20m
Lifetime	≥60000 hours
<b>Video</b>	<b>Description</b>
Resolution	1080P: 1920(H)×1080(V) 720P: 1280(H) × 720(V)
Frame Rate	TVI/AHD/CVI: 1080P@25fps(default), 1080P@30fps; 720P@25fps, 720P@30fps CVBS: PAL, NTSC
Shutter Time	PAL: 1/25s-1/50000s, NTSC: 1/30s-1/50000s
<b>Image</b>	<b>Description</b>
Exposure Mode	Four modes: Global(default),BLC,HLC,DWDR
Day/Night	24/7 color images
Digital Noise Reduction	2D/3D
White Balance	Two modes: Auto (default),Manual
WDR	DWDR
Flip	Supports 180° horizontal flip, 180° vertical flip
<b>Interface</b>	<b>Description</b>
Power Interface	5.5mm Power Interface
Video Output	BNC, supports TVI/AHD/CVI/CVBS
<b>Operating Environment</b>	<b>Description</b>
Temperature	-30°C to 60°C(-22° F to 140° F)
Humidity	≤95% RH (non-condensing)
Surge Protection	4KV for power&4KV for video output interfaces
Ingress Protection	IP67
<b>General</b>	<b>Description</b>
Power	DC12V±25%
Power Consumption	MAX 2.4W

Mount	Corner Mount&Pole Mount
Dimensions	142mm*63mm*65mm (L*W*H)
Material	Plastic
Weight	145g(0.32lb)
Certification	CB, CE, FCC

## Dimensions

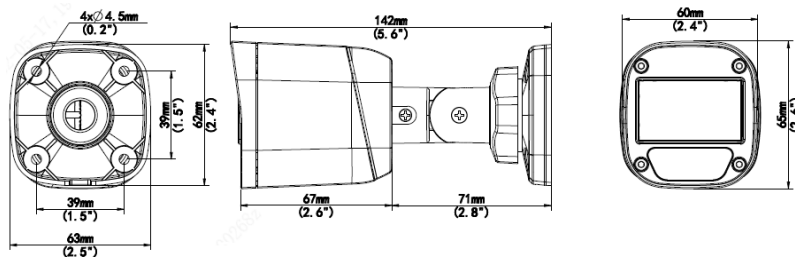

### Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2023 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.